
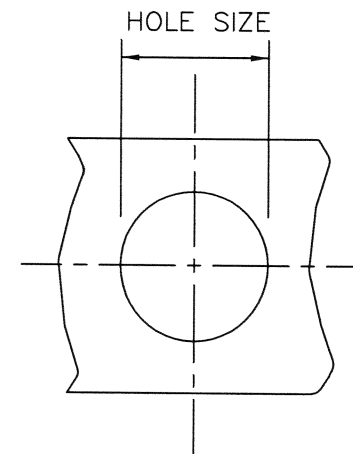
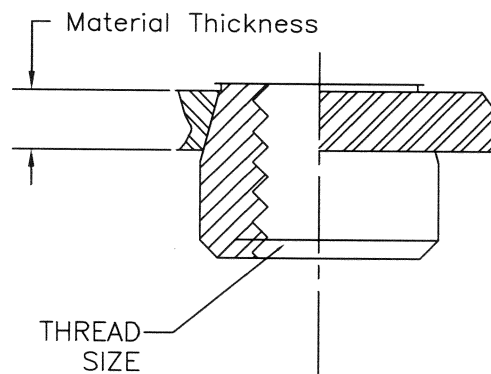


Metric Thread (Unit – Milimeters)

Part Number	Thread Size	Recommended Hole Size						
		HD $\pm .13$	L $\pm .38$	D Max.	MAT. THICK 0.76–2.29	MAT. THICK 2.31–3.15	MAT. THICK 3.17–4.72	MAT. THICK 4.72– Over
CFT2–350	M3X0.5 ISO	5.36	9.40	4.76	4.75	4.90	4.90	4.97

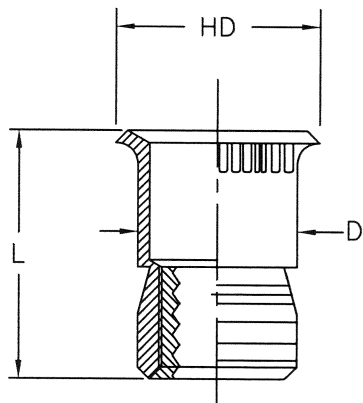

CFT Specifications

Material: Stainless Steel 303
Steel 12L14
Aluminum 6061–T6
Brass C360

Part Number Description

CFT2–350

CFT
Product Style
Cadmium free T series
Featuring 360° Swaging

2
Material
1–Stainless Steel
2–Steel
3–Aluminum
4–Brass

350
Thread Size

THIS DRAWING, AND THE INFORMATION CONTAINED HERIN, ARE THE PROPERTY OF SHEREX FASTENING SOLUTIONS. AND ARE NOT TO BE USED IN ANY MANNER DETRIMENTAL TO THE INTEREST OF THE COMPANY.

NOTE: SHEREX RESERVES THE RIGHT TO REVISE PART/DRAWING WITHOUT NOTICE.

SHEREX FASTENING SOLUTIONS

1400 COMMERCE PKWY.
LANCASTER, NY 14086 USA



SHEREX FASTENING SOLUTIONS

DRAWN BY: JLA	DATE: 8/11/03	SCALE: 1:1	TITLE: CFT RIVET NUT, OPEN END
------------------	------------------	---------------	-----------------------------------

CHECK'D BY:	DATE:	E-mail: info@sherex.com www.sherex.com Phone: 866–474–3739 Fax: 716–681–0270
APPR'D BY: AJP	DATE:	

DRAWING NO.

CFT2–350

REV	DESCRIPTION	ECN	DATE