



Huck-Spin[®] 2

The Huck-Spin Fastener,
Evolved



The Huck-Spin® 2


All the Vibration-Resistant Advantages of Huck-Spin®, and Much More

It's a whole new spin on fastening for high-volume OEM applications, heavy-assembly, and aftermarket repair.


Offering the high-performance characteristics of the classic Huck-Spin® fastener that you've come to rely on, the Huck-Spin 2 brings even more performance to every job. Because of its unique engineering and design, the Huck-Spin 2 delivers higher speed of installation than Huck-Spin, saving two to three seconds per installed fastener. Huck-Spin 2 promotes longer tool life because the thimbles last three to four times longer than original Huck-Spin thimbles in factory environments. And, Huck-Spin 2 means less tool maintenance – the lower hydraulic pressure needed leads to longer lasting

seals and hoses. While the Huck-Spin 2 is a more advanced version, it retains all the benefits of the original Huck-Spin. For instance, it features a low-impact, straight-line installation process, delivering a highly secure joint, each and every time. Huck-Spin 2 still retains a high clamp load, delivering up to eight times greater fatigue strength than conventional nuts and bolts. In addition, the Huck-Spin 2, like the original Huck-Spin, is designed with no pintail, so you can count on improved factory safety, reduced noise levels, and less impact on your Huck tooling. Greater productivity. Reduced maintenance. Increased installation speed. Get it all in the Huck-Spin 2.

- ✓ Easier installation due to reduced diameter pilot point.
- ✓ Less interference with collar tab during fit-up because of deeper bolt lock groove.
- ✓ Less likely to have “spinners” due to left-handed pull threads: thimbles can be pushed uphill onto the puller thread.
- ✓ Takes less than half of the revolutions to spin-on and spin-off because of double-helix pull grooves.
- ✓ Save two-to-three seconds installation time per installed fastener.
- ✓ Huck-Spin 2 thimbles last three to four times longer than Huck-Spin thimbles in factory environments.
- ✓ Huck-Spin 2 requires lower hydraulic pressure compared to the Huck-Spin, so seals, hoses and tools last longer.

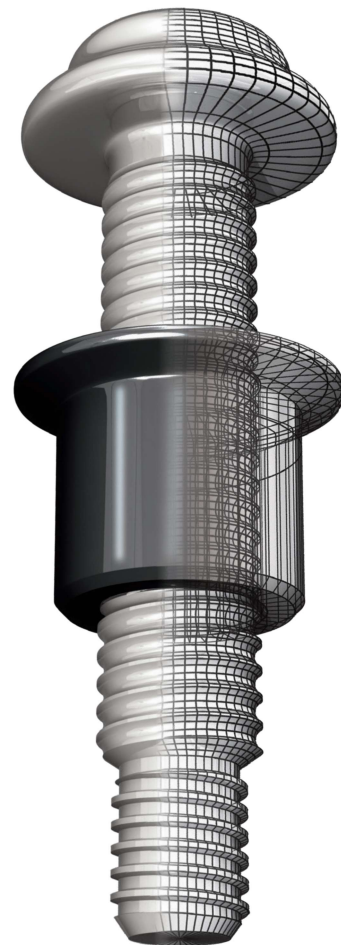


Unmatched Speed of Installation

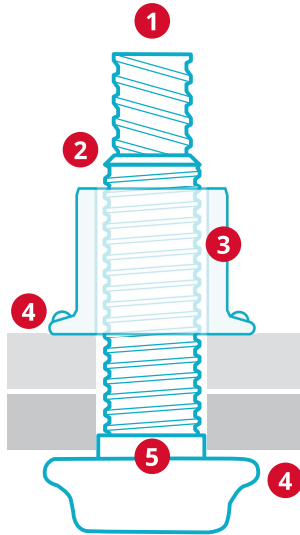


- 1 Pin protrusion allows easy removal with Spincutter™ system.
- 2 High fatigue thread form extends the life of your structure.
- 3 Corrosion resistant coatings can be painted.
- 4 Flanged collar and head spread load to ensure structural integrity.
- 5 Excellent gap pull-out and high retained clamp.


Quick, Easy Visual Inspection

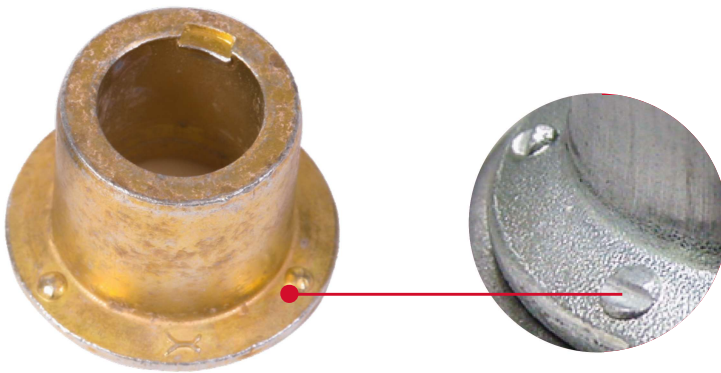


"Dots" on the Huck-Spin 2 collar indicates a full swage when at least one is crossed by the swage anvil.

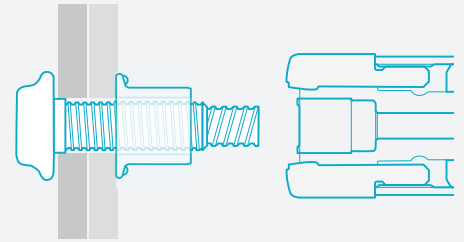


- 1 The bolt is inserted into the hole, and the collar is started onto the bolt thread by hand.

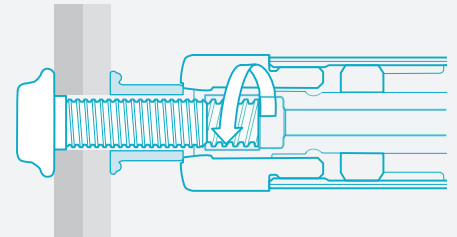

- 2 The installation tool spins onto the bolt pull threads, and removes all gap.

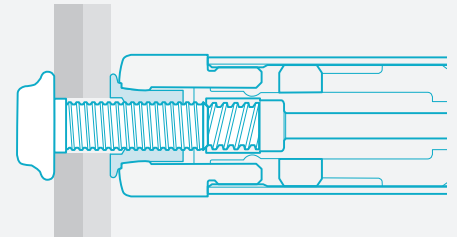


- 3 The tool continues to push the collar into the swaging anvil, locking the collar onto the bolt threads and developing clamp in the joint.

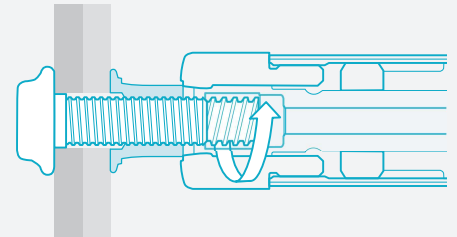

- 4 The tool ejects the collar and spins off of the bolt, completing the installation.

* Based on a typical installation of a 5/8" Grade 8 fastener

Inch Data and Dimensions

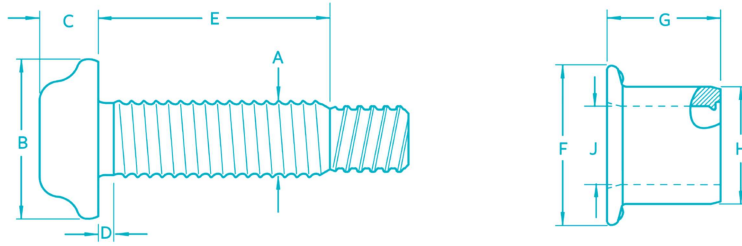

Fastener Dimensions

DIA.	A	B	C
1/2"	.500 max	1.010 – 1.080	.360 – .400
5/8"	.625 max	1.270 – 1.330	.448 – .499
3/4"	.750 max	1.520 – 1.600	.550 – .600

Collar Dimensions

DIA.	F	G	H	J
1/2"	1.010 – 1.080	.728 – .748	.762 – .772	.506 – .518
5/8"	1.270 – 1.330	.912 – .932	.953 – .963	.632 – .644
3/4"	1.520 – 1.600	1.095 – 1.115	1.145 – 1.155	.762 – .774

Grip Tables Inch


GRIP	1/2"			5/8"		3/4"	
	GRIP RANGE	D	E	D	E	D	E
4	.125 – .500	.180	1.309	.150	1.520	.180	1.712
6	.188 – .630	.180	1.434	.150	1.650	.180	–
8	.250 – .750	.180	1.559	.150	1.770	.180	1.962
10	.375 – .880	.180	1.684	.150	1.890	.180	–
12	.500 – 1.000	.180	1.809	.150	2.020	.180	2.212
16	.750 – 1.250	.180	2.059	.150	2.270	.180	2.462
20	1.000 – 1.500	.180	2.309	.150	2.520	.180	2.712
24	1.250 – 1.750	.180	2.559	.150	2.770	.180	2.962
28	1.500 – 2.000	.180	2.809	.150	3.020	.180	3.212
32	1.750 – 2.250	.180	3.059	.150	3.270	.180	3.462
36	2.000 – 2.500	.180	3.309	.150	3.520	.180	3.712
40	2.250 – 2.750	.180	3.559	.150	3.770	.380	3.962
44	2.500 – 3.000	.180	3.809	.380	4.020	.380	4.212
48	2.750 – 3.250	.380	4.059	.380	4.270	.380	4.462
52	3.000 – 3.500	–	–	.380	4.520	.380	4.712
56	3.250 – 3.750	–	–	.380	4.770	.380	4.962
60	3.500 – 4.000	–	–	.380	5.020	.380	5.212
72	4.250 – 4.750	–	–	.380	5.770	–	–

Installed Fastener Values

DIA.	MIN CLAMP (LBF)	MIN TENSILE (LBF)	MIN SHEAR (LBF)
1/2"	15,800	21,300	16,400
5/8"	26,000	36,600	26,000
3/4"	37,200	50,100	38,000

Hole Data


DIA.	MAX HOLE
1/2"	9/16"
5/8"	11/16"
3/4"	13/16"

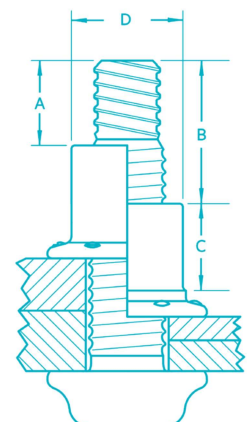

Inspection Data

DIA.	A MIN	B MAX	C MIN	D MAX	Should "A" or "B" dimensions exceed the given values, the fastener is out-of-grip. A "C" dimension less than the given value indicates an incomplete swage. A "D" dimension greater than the given values indicates an incorrect or worn anvil on the installation tool.
1/2"	.540	1.140	.568	.726	
5/8"	.675	1.300	.710	.908	
3/4"	.810	1.460	.852	1.090	

Metric Data and Dimensions

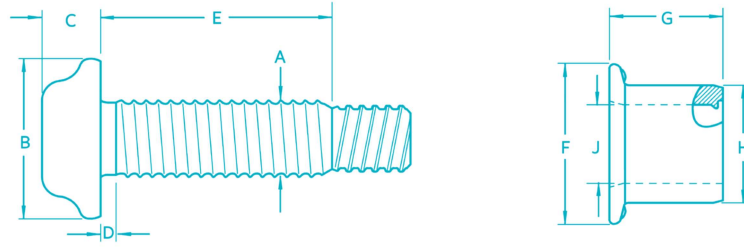

Fastener Dimensions

DIA.	A	B	C
14mm	14.0 max	30.0 max	11.5 max
20mm	20.0 max	42.4 max	16.1 max

Collar Dimensions

DIA.	F	G	H	J
14mm	28.2 – 29.6	20.5 – 21.0	21.1 – 21.5	14.0 – 14.4
20mm	40.2 – 42.2	29.0 – 29.6	30.2 – 30.6	20.1 – 20.5

Grip Tables Metric


GRIP	14MM			20MM		
	GRIP RANGE	D	E	GRIP RANGE	D	E
10	4 – 19	3.8	42.4	4 – 16	4.3	48
15	9 – 24	3.8	47.4	9 – 21	4.3	53
20	14 – 29	3.8	52.4	14 – 26	4.3	58
25	19 – 34	3.8	57.4	19 – 31	4.3	63
30	24 – 39	3.8	62.4	24 – 36	4.3	68
35	29 – 44	3.8	67.4	29 – 41	4.3	73
40	34 – 49	3.8	72.4	34 – 46	4.3	78
45	39 – 54	3.8	77.4	39 – 51	4.3	83
50	44 – 59	3.8	82.4	44 – 56	4.3	88
55	49 – 64	3.8	87.4	49 – 61	4.3	93
60	54 – 69	3.8	92.4	54 – 66	4.3	98
65	59 – 74	9.5	97.4	59 – 71	9.5	103
70	64 – 79	9.5	102.4	64 – 76	9.5	108
75	69 – 84	9.5	107.4	69 – 81	9.5	113
80	–	–	–	74 – 86	9.5	118
110	101 – 119	9.5	142.4	–	–	–

Installed Fastener Values

DIA.	MIN CLAMP (LBF)	MIN TENSILE (LBF)	MIN SHEAR (LBF)
14mm	84kN	120kN	94kN
20mm	181kN	255kN	182kN

Hole Data

DIA.	MAX HOLE
14mm	15.5mm
20mm	22mm

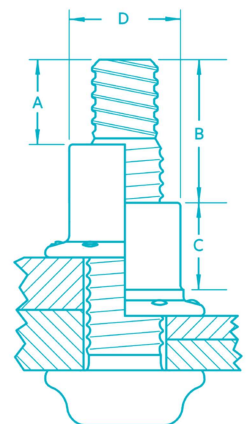

Inspection Data

DIA.	A MIN	B MAX	C MIN	D MAX	Should "A" or "B" dimensions exceed the given values, the fastener is out-of-grip. A "C" dimension less than the given value indicates an incomplete swage. A "D" dimension greater than the given values indicates an incorrect or worn anvil on the installation tool.
14mm	15.3	33.1*	15.8	20.2	
20mm	21.9	37.9	22.6	28.8	

* -110 grip max is 37mm

Ordering Information

Follow the form below to construct a part number for ordering Huck-Spin 2 pins and their respective collars. Refer to the Grip Tables (pages 4-5) for grip numbers.

Pins: (TYPE)-(DIAMETER)-(GRIP NUMBER) (FINISH)

Example: HS2P-DT16-10 is a Huck Spin 2, 1/2" Diameter, Grip 10, oil finish

Collars: TYPE-(DIAMETER)-(FINISH)

Example: MBTC-R14BL is a Metric Huck Spin 2 collar, 14mm diameter, zinc plate black chromate finish

Pins

TYPE	PREFIX	DIAMETER	CODE	GRIP	FINISH	SUFFIX
Inch	HS2P	1/2"	DT16	Refer to the Grip Tables on pages 4-5	Black Oiled	-
Metric	MHS2P	5/8"	DT20		Geomet-1 coat	NP
		3/4"	DT24		Geomet-2 Coat	D1
		14mm	DT14			
		20mm	DT20			

Collars

DIAMETER	PART NUMBER
1/2"	BTC8-R16BL
5/8" (16mm)	MBTC-R16BL
3/4"	BTC8-R24BL
14mm	MBTC-R14BL
20mm	MBTC-R20BL



Installation Tooling

Tooling Selection (Inches)

SIZE	TOOL	NOSE	STYLE
1/2"	HS37	99-7362	Installation - Standard
	HS52	99-7356	Installation - Standard (HS37 Dia. Anvil)
		99-7358	Installation - Short
		99-7359	Installation - Long
		99-7363	Installation - Standard
		99-7363CC	Removal
	HSSFT-M12	99-7660	Installation - Standard
	3585PT	99-7520	Installation - Standard
		99-7520CC	Removal
5/8"	HS52	99-7365	Installation - Standard
		99-7366	Installation - Short
		99-7367	Installation - Long
		99-7368	Installation - Extra Long
	HSSFT-M16	99-7662	Installation - Standard
		99-7662CC	Removal
		99-7662-5	Installation - Standard
	3585PT	99-7521	Installation - Standard
		99-7521CC	Removal
3/4"	HS52	99-7364	Installation - Standard
		99-7364CC	Removal
	3585PT	99-7523	Installation - Standard
		99-7523CC	Removal

Tooling Selection (Metric)

SIZE	TOOL	NOSE	STYLE
14mm	HS52	99-7465	Installation - Standard
	HSSFT-M16	99-7762	Installation - Standard
		99-7762-4	Installation - Long
	3585PT	99-7531	Installation - Standard
		99-7531CC	Removal
16mm	HSSFT-M16	99-7662	Installation - Standard
		99-7662CC	Removal
		99-7662-5	Installation - Long
	3585PT	99-7521	Installation - Standard
		99-7521CC	Removal
20mm	HS52	call for info	Installation - Standard
	3585PT	99-7468 - 20MM HS52	Installation - Standard
		99-7563 99-7563CC	Removal

Model
3585PT

