

POP®

Gain the advantage.


POP® PB2500 Cordless Tool for Blind Rivets

- High capacity, compact and lightweight, with lithium ion battery
- Spent mandrels automatically drop into collector
- Award winning ergonomic design
- Capacity: 3/32 – 3/16" (2.4 – 4.8mm) diameter steel rivets
- Tool weight: 3.7 lbs. (1.69kg) – including battery
- Rivet holding mechanism
- 18v Li-Ion battery charges in 30 minutes

NEW

Rivet holding mechanism

Rivets do not drop out – even when tool is set upside down



Integral mandrel collector

Large capacity collector can store up to **600** rivets



Easy nose housing removal

No tools needed to remove nose housing from jaw case






PB2500 Cordless Tool for Blind Rivets


Specifications

Dimensions:	12.6 in (320mm) x 9.4 in. (240mm) H
Battery:	18V Li-Ion 1.5 Ah slim battery pack (POP® EBC181-NA) 30 minute charge time
Charger:	20V Li-Ion (POP® EBC101-NA), with progress lamp display
Stroke:	0.98 in (25mm)
Sound:	73,7 dB(A)
Traction power:	1900 lbf (8,500 N)
Rivet Diameter:	3/32 – 3/16" (2.4 – 4.8mm) Steel body/Steel mandrel
Weight:	3.7 lbs. (1.69 kg) including battery

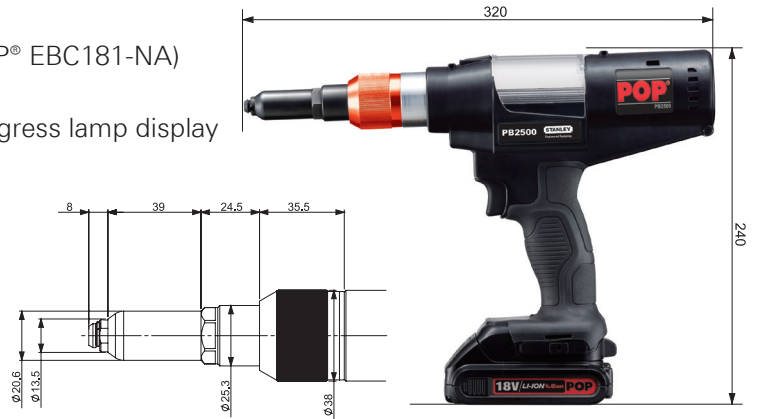

High fastening speed

When fastening 3/16 in (4.8mm) diameter steel POP® rivet

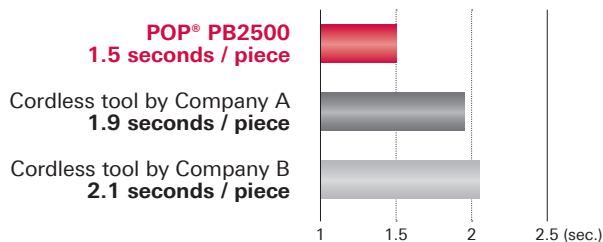


* Results based on Stanley in-house testing

* Measured the time from triggering the tool until returning to the state ready for inserting the next rivet

Less energy consumption

When fastening 3/16 in (4.8mm) diameter steel POP® rivet

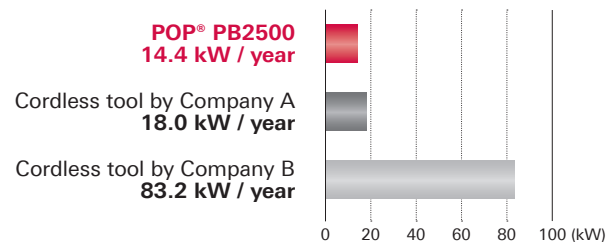


* Results based on Stanley in-house testing

* Calculated as fastening 480,000 rivets a year

Long battery life

When fastening 3/16 in (4.8mm) diameter steel POP® rivet

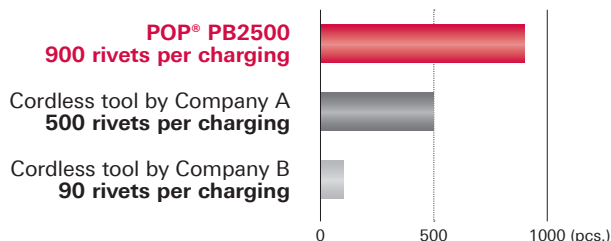


* Results based on Stanley in-house testing

* Number of rivets fastened with fully charged battery

Long stroke

When fastening 3/16 in (4.8mm) diameter steel POP® rivet

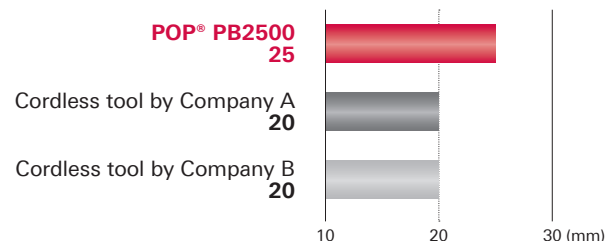

* Results based on Stanley in-house testing

Stanley Engineered Fastening
4 Shelter Rock Lane
Danbury, CT 06810

Tel: 877-EMHART1
Tel: (877) 364-2781
Fax: (800) 225-5614



P587 Rev.1 (05/13)

STANLEY
Engineered Fastening