



POP®

ProSet® 3400 Rivet Tool

Lightweight Tool with Heavyweight Force

Features & Benefits:

- **Ergonomic**

Lightweight, strong polymer construction
Comfortable two finger, low activation force trigger
Directionable air exhaust (MCS model)
On/Off, left or right swivel air fitting

- **Performance / Economy**

High force-to-weight ratio
Quick disconnect nose housing
Quick disconnect jaw case
Quick disconnect Mandrel Collection System
Spring return for a reliable fast setting cycle

- **Adaptability**

POP® Rivet Presenter (RP) compatibility
POP® Remote Mandrel Collection System (MCS5000)
POP® Specialty Heads

- **Safety**

Air-isolation switch during MCS removal

The lightweight ProSet® 3400 Rivet Tool is the heavyweight of the ProSet® family. The high capacity 3400 delivers the highest pulling force in its class but weighs in at just over 4 lbs.

Built with ergonomics in mind, this tool features the patented Quick Disconnect nose housing and jaw case for rapid maintenance of the front end – with no need for tools! The Quick Disconnect Mandrel Collection System (MCS) safely collects spent mandrels for easy disposal and cleaner work areas. The air isolation switch on the MCS eliminates air flow when the MCS is disconnected. A rugged aluminum casting is designed to prevent damage and enhances the life of the tool.

The left-right 90° swivel air fitting ensures the tool can be adapted to any workstation and the “on/off” switch minimizes air consumption and noise. A spring return ensures fast, consistent and reliable setting cycles reducing operating costs. The ProSet® 3400 is compatible with the POP® Rivet Presenter, the POP® Remote MCS System (MCS5000) and POP® specialty heads.

The 3400 will set 1/8" (3.2mm), 5/32" (4.0mm), 3/16" (4.8mm) and 1/4" (6.4mm) diameter rivets in all materials including stainless steel high strength structural rivets.


Quick Disconnect
Mandrel Collector



Quick Disconnect
Nosehousing



Quick Disconnect
Jaw Guide Technology




www.emhart.com

**Emhart®
Teknologies**
POP®




ProSet® 3400 Rivet Tool

ProSet® 3400

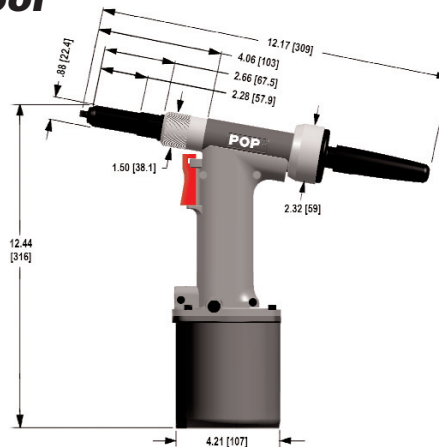

ProSet® 3400 MCS

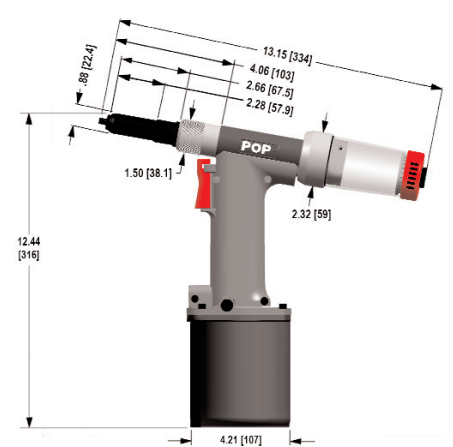

Specifications

Model Number	ProSet® 3400	ProSet® 3400MCS
Weight	4.19 lbs. (1.90 kg)	4.41 lbs. (2.00 kg)
Length	12.17" (309 mm)	13.15" (334 mm)
Height	12.44" (316 mm)	
Tool stroke	1.02" (26 mm)	
Pulling force	4,160 lbs @ 90 psi (18,500 N @ 6.2 bar)	
Force/Weight ratio	993 lbf/lb (9.7 kN/kg)	943 lbf/lb (9.2 kN/kg)
Air consumption	0.172 cu. ft/rivet (4.86 liters/rivet)	2.83 scfm (max) [80 liters/min (max)]

Rivet Capacity

Rivet Type	Material (Body-Mandrel)	Rivet Diameter			
		1/8" (*) (3.2 mm)	5/32" (*) (4.0 mm)	3/16" (**) (4.8 mm)	1/4" (†) (6.4 mm)
Open End & Multi-Grip™	Al – Al	✓	✓	✓	✓
	Al – St / SS	✓	✓	✓	✓
	St – St	✓	✓	✓	✓
	SS – SS; Mo – St / SS	✓	✓	✓	✓
Closed End	Al – Al	✓	✓	✓	✓
	Al – St / SS; Cu – St	✓	✓	✓	✓
	St – St	✓	✓	✓	✓
	SS – SS	✓	✓	✓	✓
LSR Rivets	Al – Al	✓	✓	✓ (†)	NA
T Rivet	Al – St	✓	✓	✓ (†)	✓
Self Plugger	St – St	✓	✓	✓ (†)	✓
HR™ Rivets	St – St	✓	✓	✓ (†)	X
HS Rivets	Al – Al; St – St	NA	NA	NA	✓
Ultra-Grip®	Al – Al; St – St; SS – SS	NA	NA	✓ (†)	✓

Al: Aluminum, St: Steel, SS: Stainless Steel, Cu: Copper, Mo: Monel

(*) Use PRG540-46 Jaws with FAN276-064 Jaw Pusher Setup

(**) Use PRG540-46 Jaws and DPN276-006 Jaw Pusher Setup

(†) Use PRG540-44 Jaws and DPN276-006 Jaw Pusher Setup

Optional Accessories

Part Number	Description
FA203-408	MCS5000 Adaptor kit for 4, 5, 6 size rivets
FA203-414	MCS5000 Adaptor Kit for 8 Size Rivets
FAN276-075	ProSet® 3400 8" Front End Extension kit
FAN276-152	ProSet® 3400 Seal kit
FAN276-165	Mandrel Collection System Retrofit kit
PRH840-3400	PRH840 Corner Head Adaptor
PRH850-3400	PRH850 Corner Head Adaptor
RP4-501	RP4/ RP5 Receptacle
RP6-501	RP6 Receptacle



Corner Head



MCS Retrofit Kit

Americas

Emhart Technologies
P.O. Box 859
50 Shelton Technology Center
Shelton, CT 06484 USA
Tel: (877) EMHART1
Fax: (800) 225-5614

Canada: (514) 351-0330
Brazil: + 55 11 3871-6460
México: + 52-55-5326-7100

Europe

Emhart Technologies
177 Walsall Road, Perry Barr
Birmingham, B42 1BP, UK
Tel: +44 (0) 121 331-2460
Fax: +44 (0) 121 356-1598

Asia Pacific

Emhart Technologies
Shuwa Kioicho Park, Bldg 3F
3-6 Kioicho, Chiyoda-Ku
Tokyo 102-0094, Japan
Tel: +81 (03) 3265-7291
Fax: +81 (03) 3265-7298

© 2008 Emhart Technologies

P553 (06/08) 5 M

Emhart® Tecnologies